

## Connecting single color Flexible LED Strip to Strip Butt (Crimp) Connectors


**Step #1:** Place flex strips end-to-end with wires sticking straight up.

**Step #2:** Cut off both pairs of wires, leaving 1½" of wire on each strip.

**Step #3:** Pull smaller wires apart. Then, twist same colors together.



**Step #4:** Make a connection by inserting a pair of like-colored wires the entire way into the butt connector. With them inserted the whole way, crimp the butt connector with Channel-Lock or Robo-Grip type pliers.

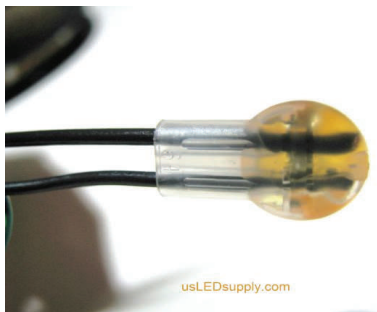

**Step #5:** Repeat the process (two wires per butt connector) for the remaining colored wire pair.

