


USLED SUPPLY.COM

Connecting single color LED lights to a Terminal Block

The steps of this process apply to terminal blocks of any size. Just make sure you correlate the wires with

Step #1: Make sure all ports on terminal block are open (Turn clockwise to tighten, counter-clockwise to loosen).

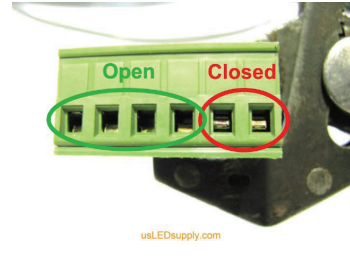

Step #2: Strip the red and black flex strip wires about 1/4".



Step #3: Insert wires into the terminal block in the correct order. Make sure you insert the right wire color into the matching color code letter on the terminal block.

Red wire = (+) positive power output
Black wire = (-) negative power output



Step #4: Tighten down the screws above the wires you have inserted. Try pulling each wire out of terminal block in order to insure that they are fastened securely. If one is not secure, loosen the terminal and start over. Reinsert the wire and tighten the screw. The wires will be easier to insert if they are twisted first.

Step #5: Connect the power wires to the terminal block (if using our female barrel plug). Insert the wires into the power input terminals, Red (+) Black (-).



Option: You can connect more than one wire into each terminal on the terminal block. Simply follow the instructions above, making sure to pull on each individual wire when completed.

