

Cutting RGB Flexible LED Strip

Step #1: Locate the cut line (There will be one every 3.94 inches) and cut along this line.




usLEDsupply.com




usLEDsupply.com

Step #2: Remove about a ¼” of the waterproof coating from the end of the strip. You may use your fingernail (if you use a knife be very careful not to cut through the circuit board). *Note: you can leave the coating on if you will not be connecting to this end of the strip.*

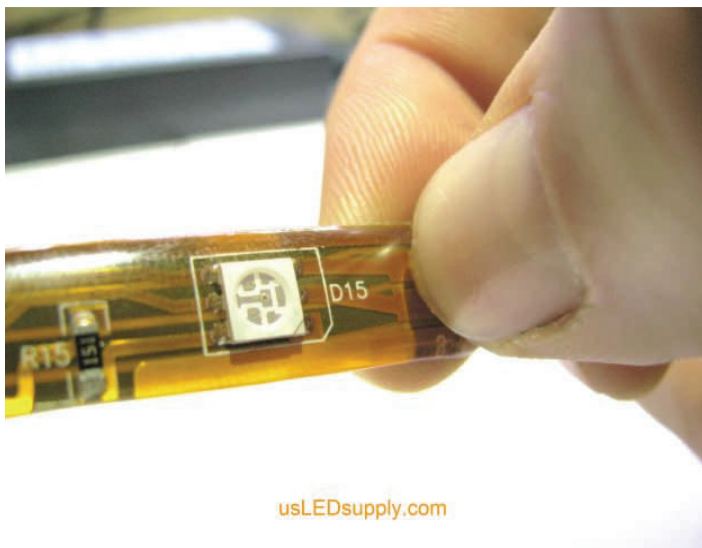

usLEDsupply.com

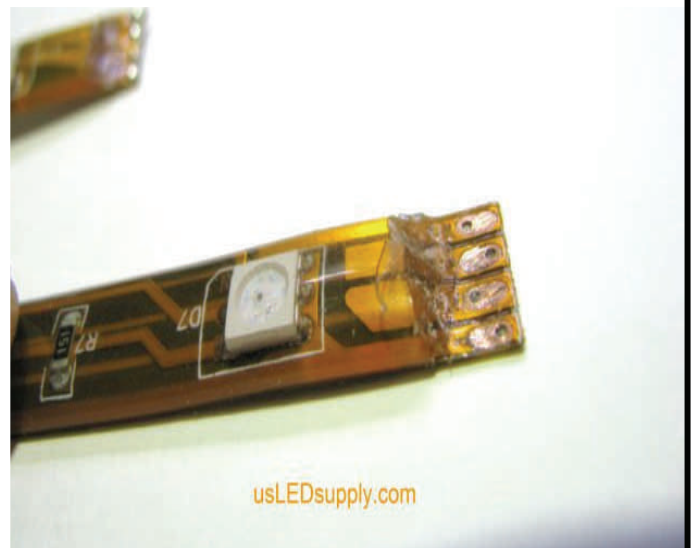

usLEDsupply.com