

Cutting RGB Flex Strip

Step #1: Locate the cut line (There will be one every 3.94 inches) and cut along this line.




usLEDsupply.com



usLEDsupply.com

Step #2: Remove about a 1/4" of the waterproof coating from the end of the strip. You may use your fingernail (if you use a knife be very careful not to cut through the circuit board).

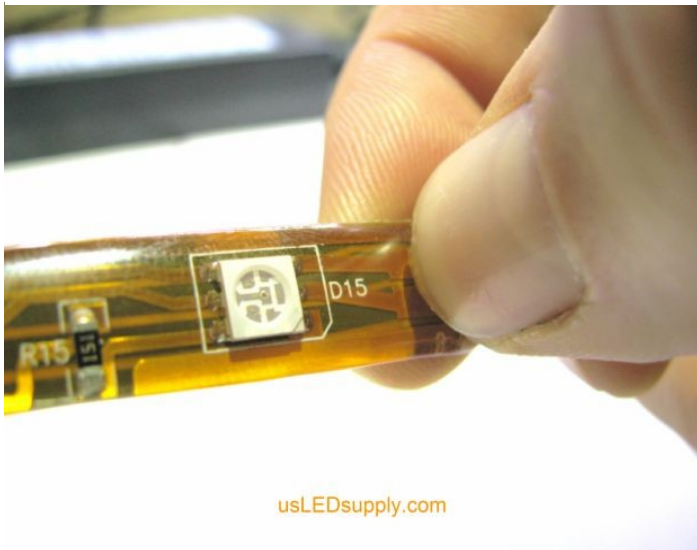

usLEDsupply.com



usLEDsupply.com

US LED SUPPLY.COM